


# Motor Mount Installation

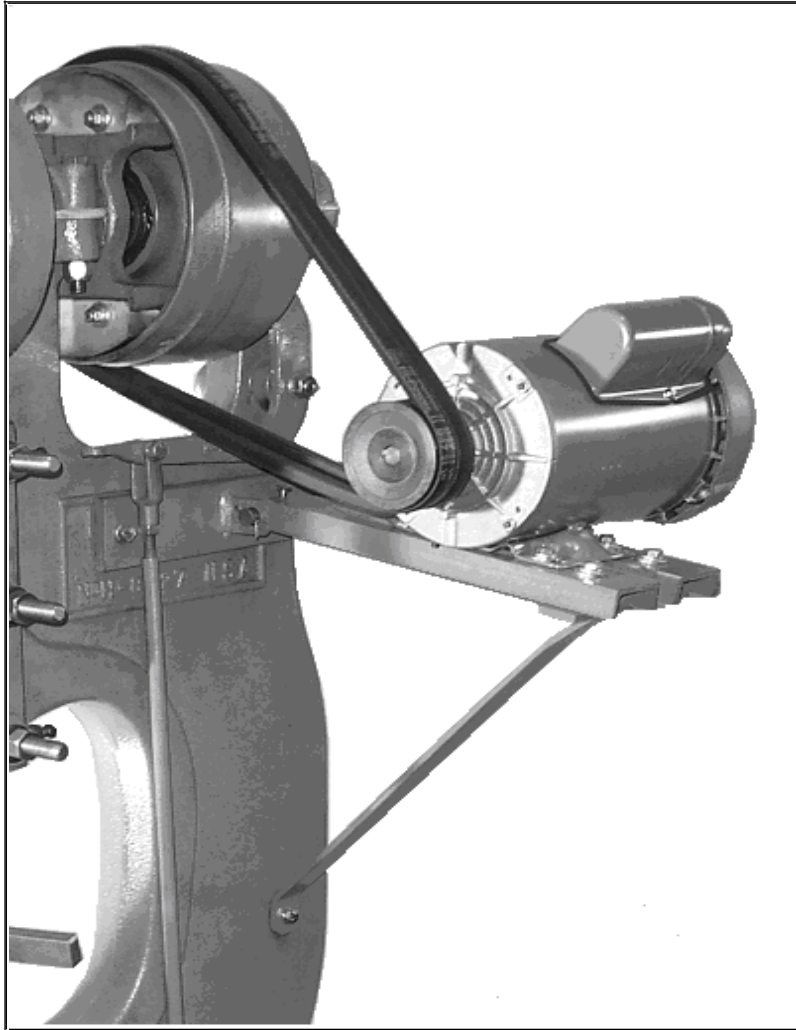

## Part# Motor Mount

Please specify H, K, or P (25, 50 or 100#)

Can be used for Center or Rear clutch application!

Install the motor mount approximately 3 to 4 inches below the crotch of the frame. The left-right placement is determined by the position of the belts and pulleys on the motor. Slots cut in the rails of the motor mount allow adjustment of belt tension. The T-bracket supports the motor mount assembly; belt tensioning is done with the slots.

USE 5/16 drill for frame then tap hole 3/8-16 ,USE F drill for the T-Bracket then tap hole 5/16-18

Use B type Vee Belts

25# NEMA FRAME 56 or 56H

50# NEMA FRAME 182 or 182T

**Prices H/K \$160 P \$262**

Little Giant DBA MMI  
6414 King Road  
Nebraska City, NE 68410  
Email; mm21654@gmail.com  
www.LittleGiantHammer.com